

W1: Continuous running water level

Material of construction



Item No.	Part name	Material	Item No.	Part name	Material
01	Hose coupling	Cast iron	28	Rotor	Shaft: AISI420SS
02	Handle	Rubber&steel	31a	Bearing	Ball bearing
05	Upper cover	Cast iron	31b	Bearing	Ball bearing
11	Motor body	Cast iron	33	Motor protector	
13	Pump body	Cast iron	34	Mechanical seal	Sic-Sic/Carbon-Sic (< 2.2kW) Sic-Sic/Sic-Sic (> 3.7kW)
14	Impeller	High chrome alloy	35	Oil seal	
16	Inlet plate	Ductile iron	47	Cable	
25	Strainer	Steel			
27	Stator				

Dimensions & weights

Model (50/60Hz)	d mm	A mm	A1 mm	B mm	D mm	H mm	W1 mm	N.W Kg	G.W Kg	Packing dimension mm
KBZ21.5	50	235	173	535	216	505	120	36	40	610x265x265
KBZ31.5	80	235	173	535	216	505	120	36	40	610x265x265
KBZ22.2	50	235	173	535	216	505	120	39	43	610x265x265
KBZ32.2	80	235	173	535	216	505	120	39	43	610x265x265
KBZ23.7	50	283	208	628	252	629	150	63	68	710x320x295
KBZ33.7	80	283	208	628	252	629	150	63	68	710x320x295
KBZ43.7	100	283	208	642	252	629	150	63	68	710x320x295
KBZ35.5	80	283	208	671	252	590	150	77	84	750x350x360
KBZ45.5	100	283	208	686	252	590	150	77	84	750x350x360
KBZ47.5	100	330	240	764	314	676	190	106	116	835x365x385
KBZ67.5	150	330	240	790	314	676	190	108	119	865x365x385
KBZ411	100	373	255	807	350	695	190	136	148	885x415x435
KBZ611	150	373	255	807	350	695	190	139	150	885x415x435
KBZ415	100	373	255	842	350	755	190	144	158	935x415x435
KBZ615	150	373	255	842	350	755	190	146	160	935x415x435

KBZ SUBMERSIBLE DRAINAGE PUMP



Performance curves

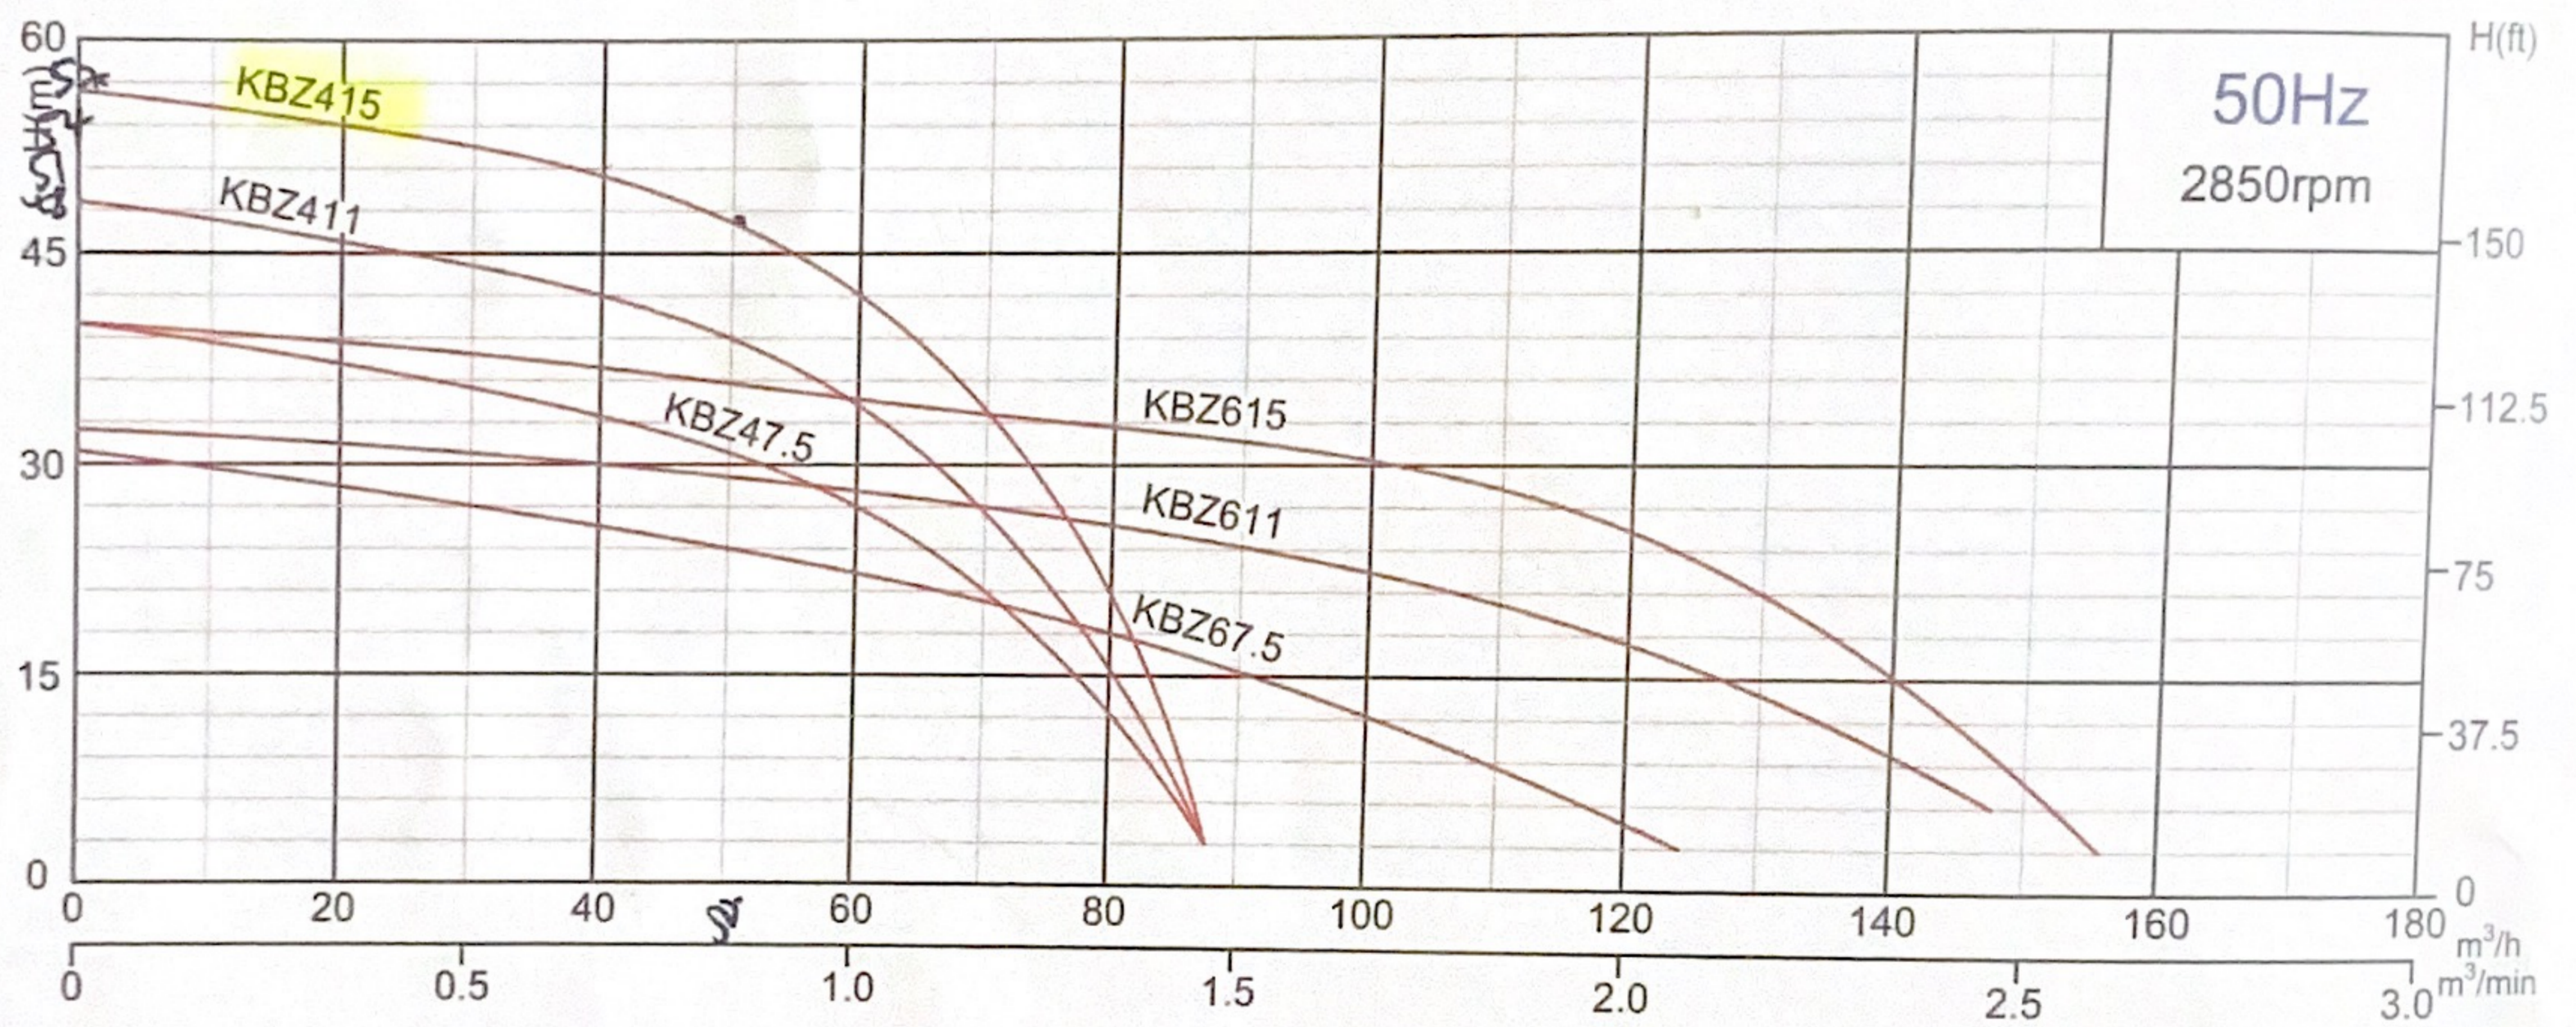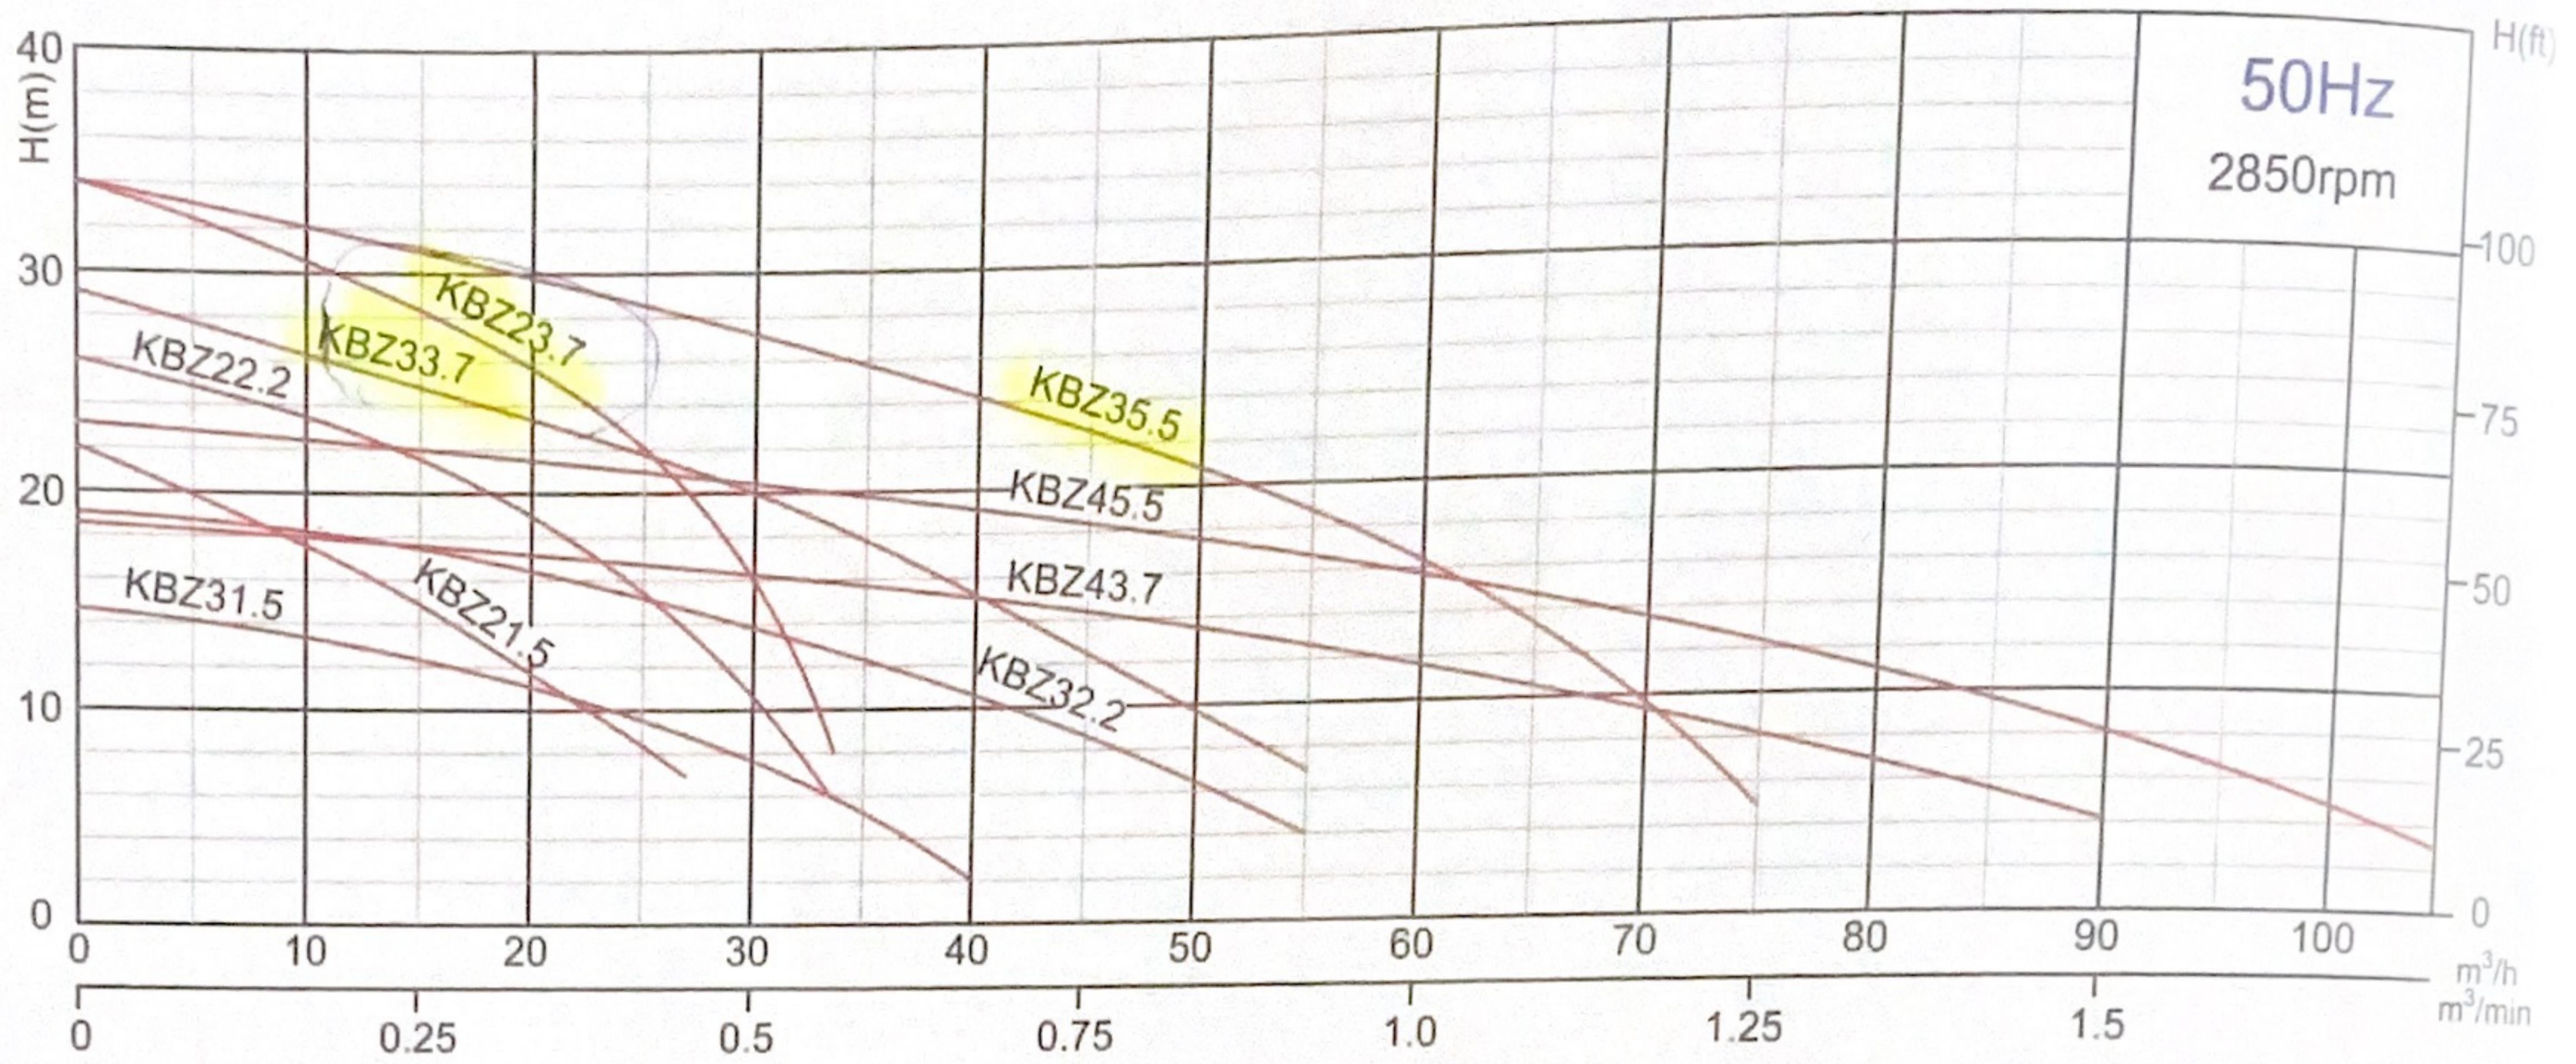

Performance table

Model (50Hz)	Outlet mm	Motor power		Rated current (400V) A	Rated capacity		Rated head m	Max capacity		Max Head m	Impeller Passage mm
		kW	HP		m³/h	m³/min		m³/h	m³/min		
KBZ21.5	50	1.5	2	3.5	15	0.25	15	27	0.45	22	8.5
KBZ31.5	80	1.5	2	3.5	30	0.50	8	40	0.67	14.5	8.5
KBZ22.2	50	2.2	3	5.0	18	0.30	20	33	0.55	26	8.5
KBZ32.2	80	2.2	3	5.0	36	0.60	11	55	0.92	19	8.5
KBZ23.7	50	3.7	5	7.7	12	0.20	30	33	0.55	34	8.5
KBZ33.7	80	3.7	5	7.7	30	0.50	20	55	0.92	29	8.5
KBZ43.7	100	3.7	5	7.7	60	1.0	11.5	90	1.50	18.5	8.5
KBZ35.5	80	5.5	7.5	11.4	36	0.60	25	75	1.25	34	8.5
KBZ45.5	100	5.5	7.5	11.4	60	1.0	16	105	1.75	23	8.5
KBZ47.5	100	7.5	10	15	48	0.80	30	84	1.40	40	11.5
KBZ67.5	150	7.5	10	15	90	1.60	15	124.8	2.08	31	19.5
KBZ411	100	11	15	22	60	1.0	35	84	1.40	48.5	11.5
KBZ611	150	11	15	22	102	1.70	22	147	2.45	32	19.5
KBZ415	100	15	20	29.5	60	1.0	42	84	1.40	56	11.5
KBZ615	150	15	20	29.5	102	1.70	30	156	2.60	40	19.5

Performance curves

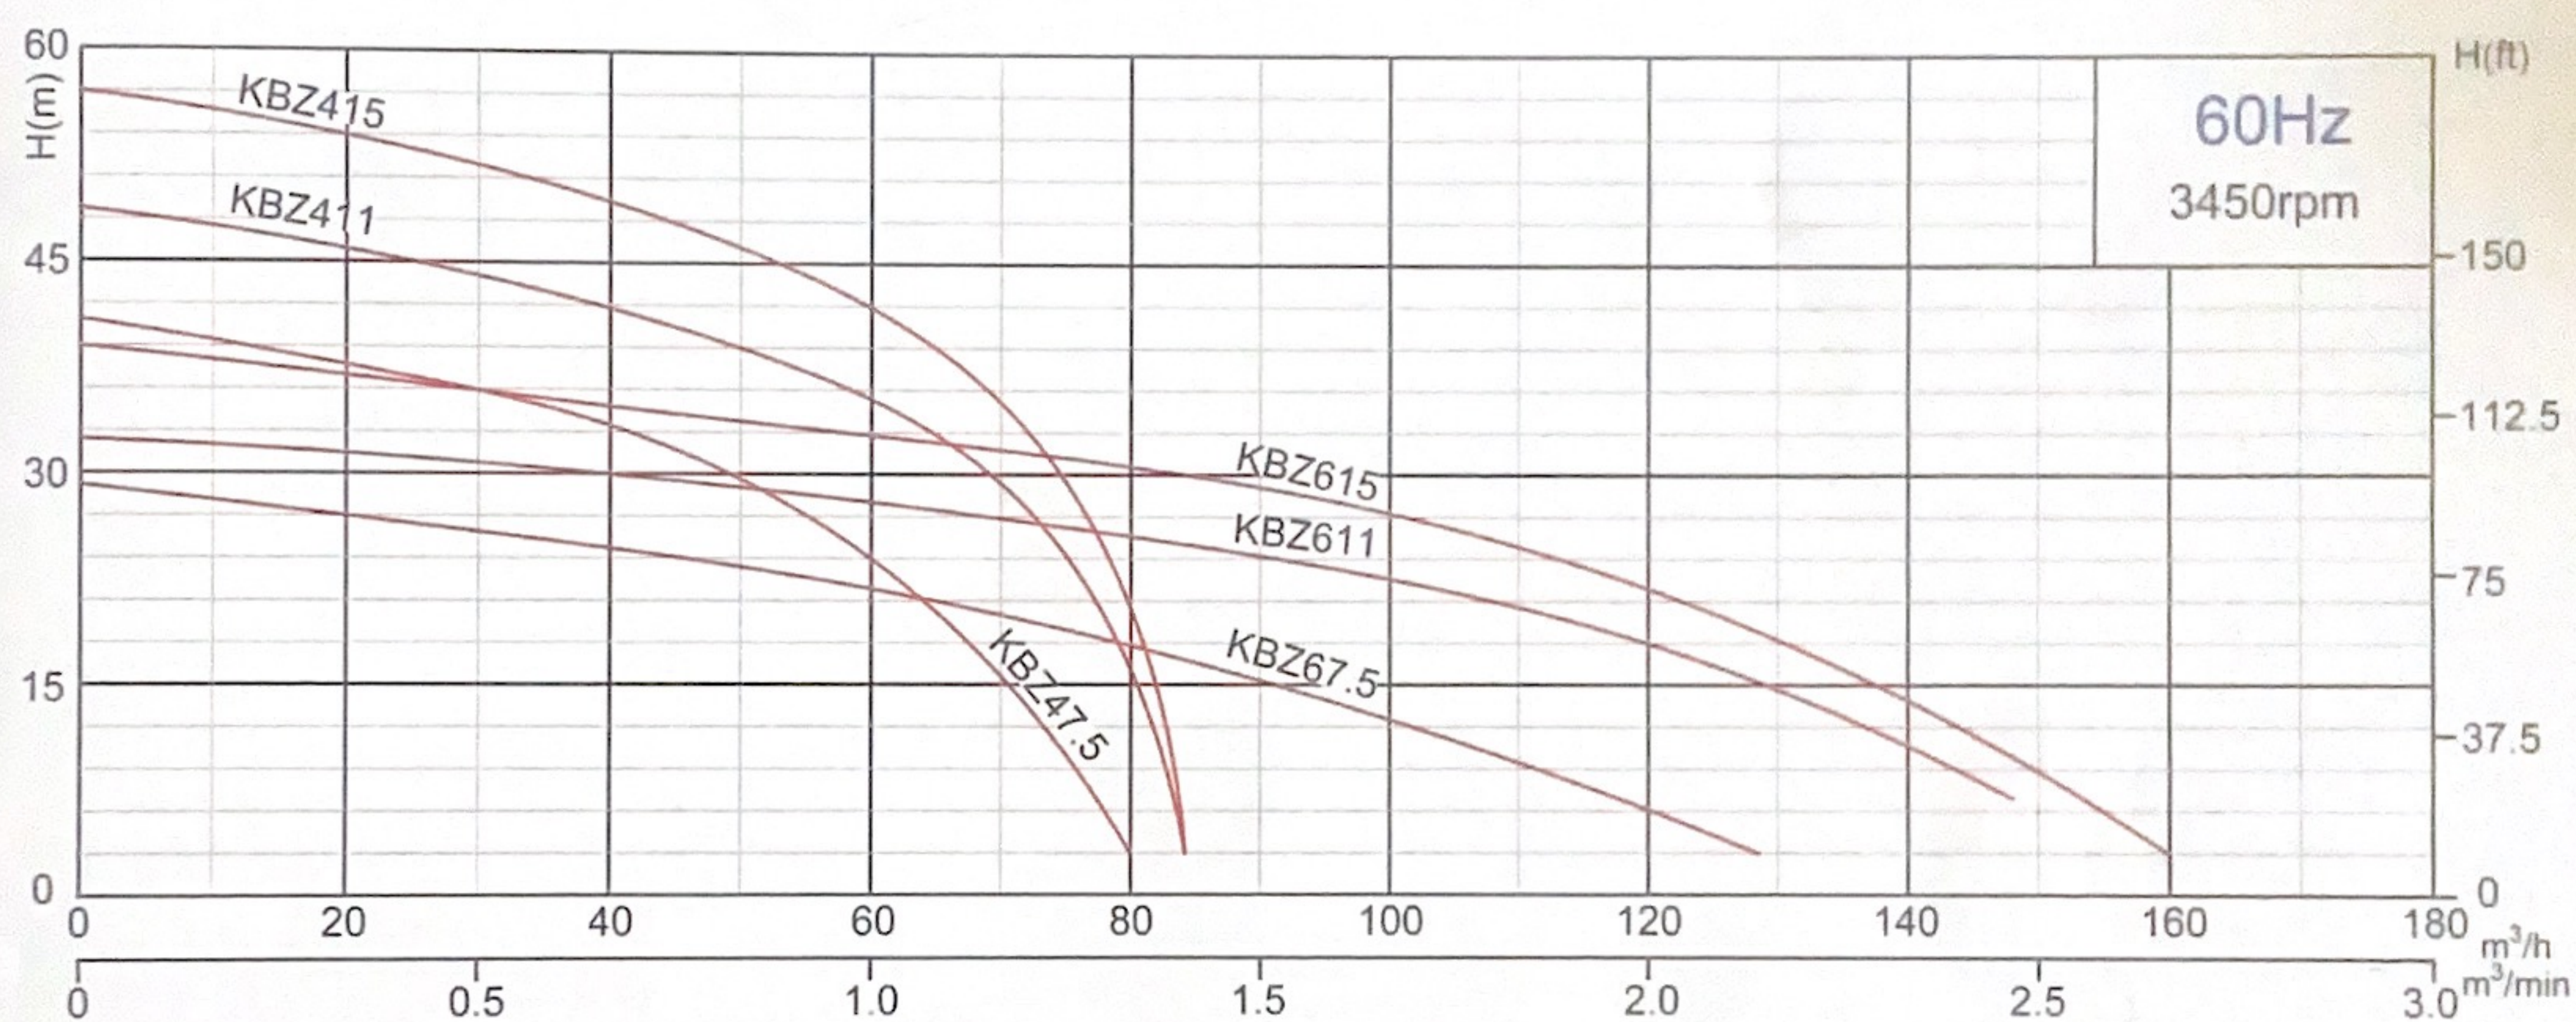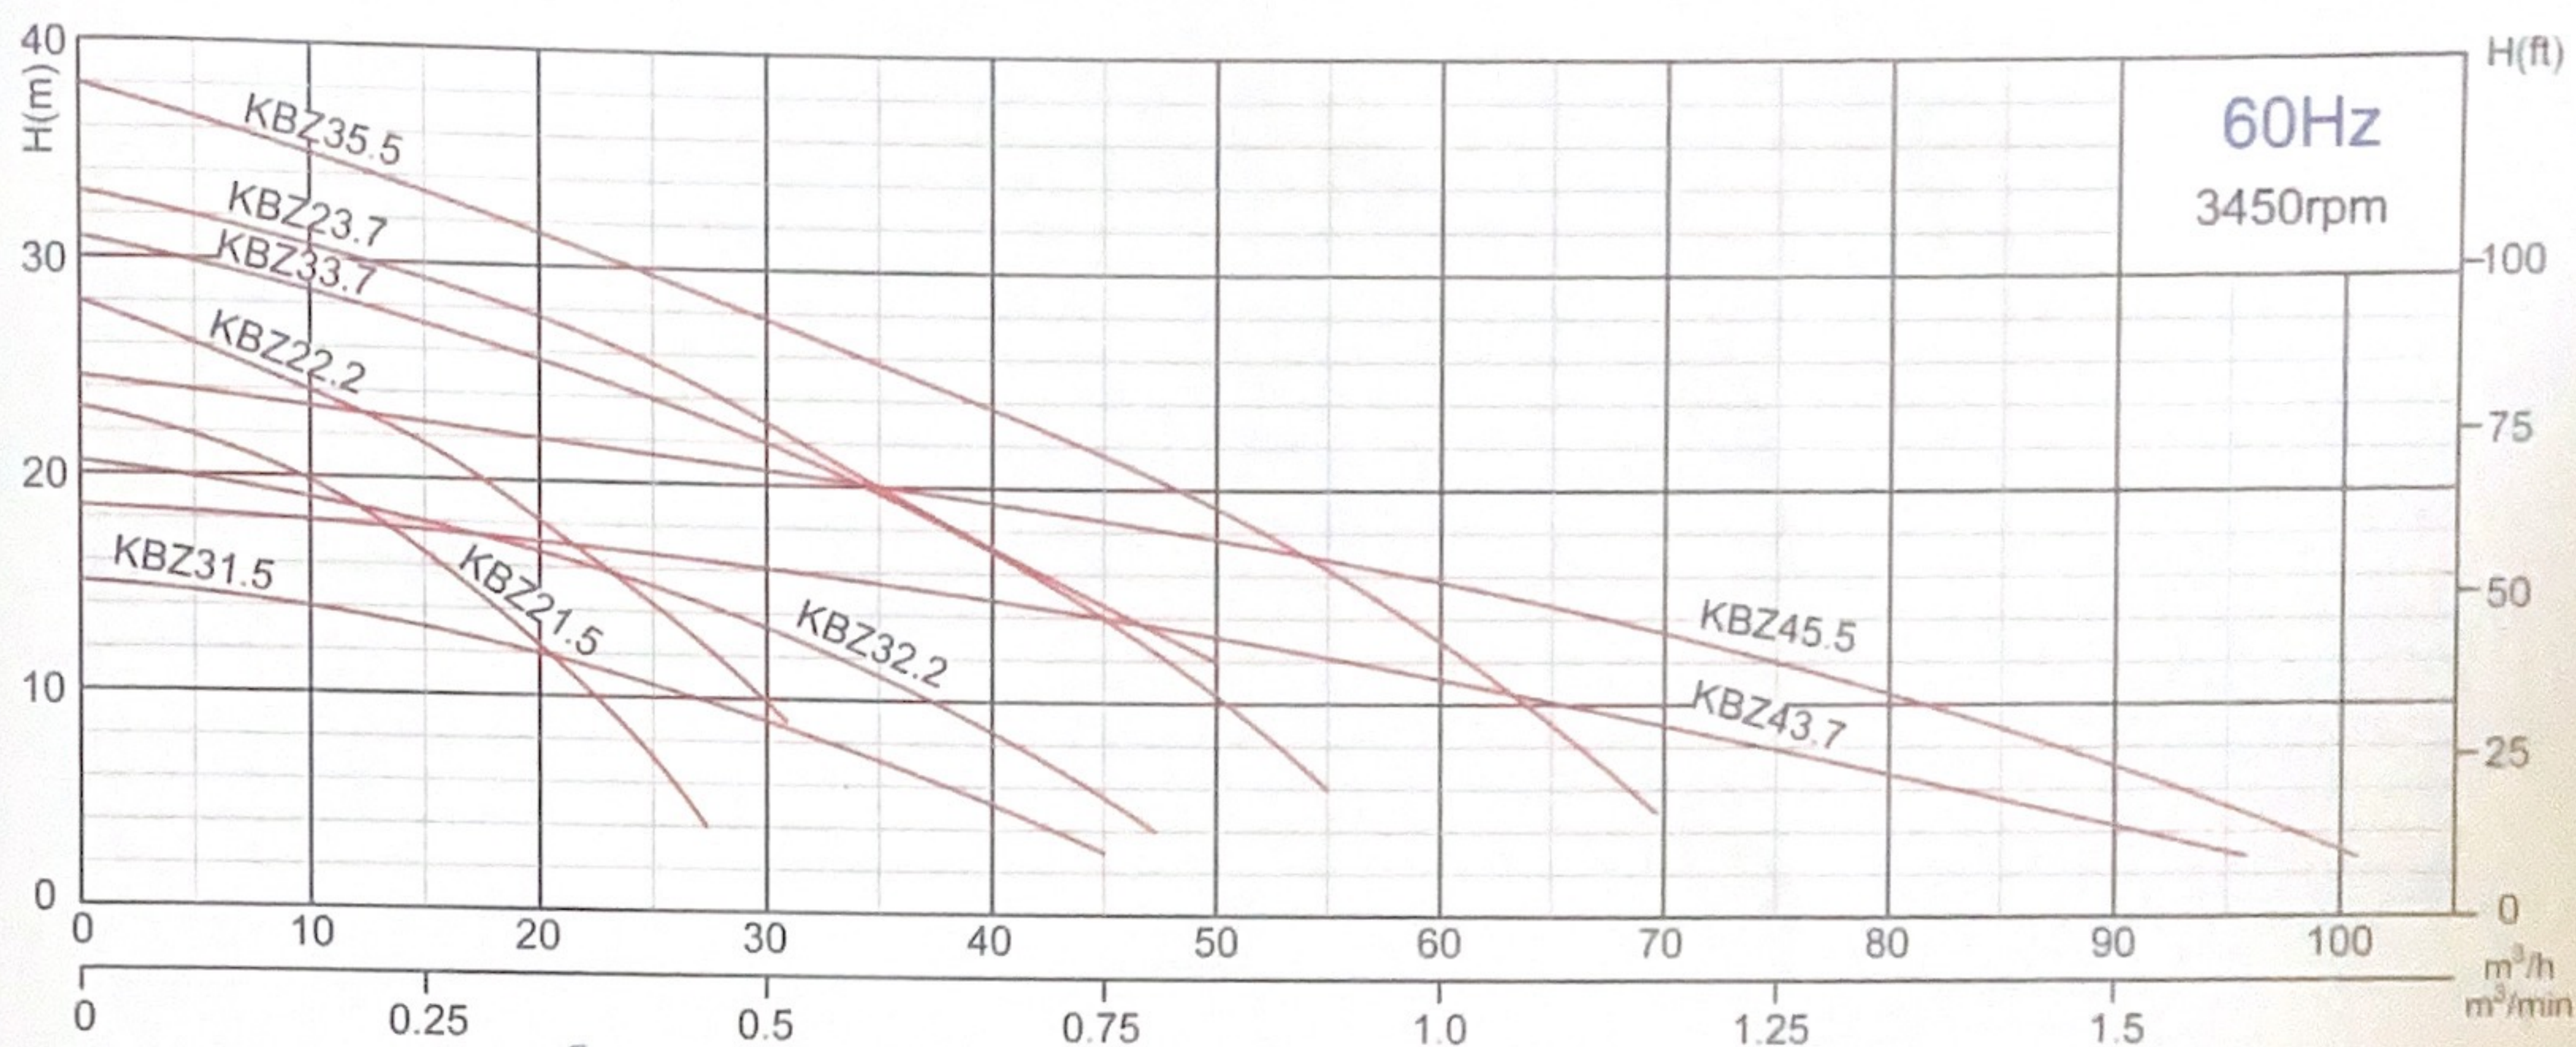

Performance table

Model (60Hz)	Outlet mm	Motor power		Rated current (380V) A	Rated capacity		Rated head m	Max capacity		Max Head m	Impeller Passage mm
		kW	HP		m³/h	m³/min		m³/h	m³/min		
KBZ21.5	50	1.5	2	3.5	15	0.25	16.5	27	0.45	23	8.5
KBZ31.5	80	1.5	2	3.5	30	0.50	9	45	0.75	15	8.5
KBZ22.2	50	2.2	3	5.1	18	0.30	20	31	0.52	28	8.5
KBZ32.2	80	2.2	3	5.1	30	0.60	13	47	0.78	20.5	8.5
KBZ23.7	50	3.7	5	8.0	12	0.20	30	50	0.83	33	8.5
KBZ33.7	80	3.7	5	8.0	30	0.50	22	55	0.92	31	8.5
KBZ43.7	100	3.7	5	8.0	60	1.0	11.5	96	1.60	18.5	8.5
KBZ35.5	80	5.5	7.5	11.6	36	0.60	25	69	1.15	38	8.5
KBZ45.5	100	5.5	7.5	11.6	60	1.0	16	102	1.70	24.4	8.5
KBZ47.5	100	7.5	10	15.4	48	0.80	30	80	1.33	41	11.5
KBZ67.5	150	7.5	10	15.4	90	1.60	15	127	2.12	31	19.5
KBZ411	100	11	15	22.5	60	1.0	35	84	1.40	48.5	11.5
KBZ611	150	11	15	22.5	102	1.70	22	147	2.45	32	19.5
KBZ415	100	15	20	30	60	1.0	42	84	1.40	57	11.5
KBZ615	150	15	20	30	102	1.70	27	160	2.67	39	19.5